



150W Highbay Light


Focus Series

Features


- ★ Good aluminum alloy heat sink with good quality heat dissipation, high strength.
- ★ High quality constant current driver-Mean Well, both to ensure the stability of the product, but also greatly reduce the power consumption.
- ★ Adopting Epistar or Birdgelux integrated chip, ant glare.
- ★ Constant voltage, constant current. Over voltage \ over power \ over current protection, lighting protection.
- ★ Start up within 1'3 seconds, no flicker, anti-jamming, no mercury, energy saving, environment friendly.




Size

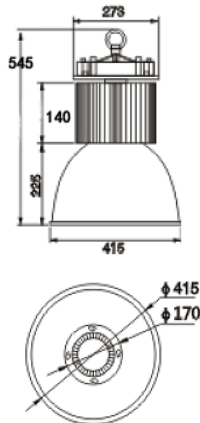

Intensity of illumination

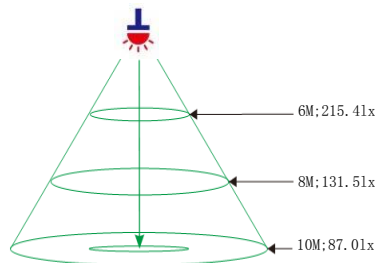

Distribution Chart



Technical Parameters


Item No.	WL-BR-HB-015
Input Voltage	AC 90-277V 50/60Hz
Working Voltage	DC 30-36V
Power Factor	>0.9
LEDs	3PCS*50W
Power Consumption	155W
Luminous Flux	>13000lm
Color Temperature	3000K/4500K/6000K
CRI	Ra>70
Beam Angle	45°90°120°
Working Temperature	-25℃+45℃
Working Humidity	10%-90% RH
Keeping Temperature	-40℃+65℃
Lifespan	≥50000H
Material	6063AL+lens
Heatsink	D200*H140mm
Packing Size	250*250*340mm
Net Weight	6.5KG
IP class	IP65

Application

★ Factories, workshops, warehouses, exhibition centers, shopping malls or supermarkets, stadiums, toll stations, etc.



Angle Reflector

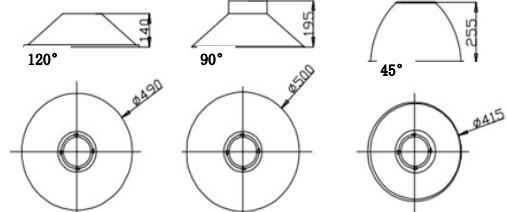

Make comfortable
Make colorful

Willighting(Shenzhen) Co.,Ltd
Add: 6F E Building of Hong Rongfa Industry Area, No. 460 Xiang Shan Rd, Luotian Songgang,
Shenzhen, Guangdong, China
Tel:+86-755-27649783 sales@willighting.com www.willighting.com