




WL-F12V-60C-OB4

Each leds on the led strips could be controlled or changed freely. It is good choice for some colorful drawing appliances.

		CUTTING INTERVALS		
		VOLTAGE		
can be cut into 49.5mm LENGTH				
☐ 5V ☒ 12V			PCB COLOUR	
		PITCH		
☐ 30 ☒ 60 ☐ 90 (leds/m)			PROTECTION OPTIONS	
		COLOUR OPTIONS		
☒ IP44 ☒ IP65 ☒ IP68			DIMENSIONS	
R:625nm G:525nm B:465nm			REEL LENGTH	
☒ 5 M ☐ 10 M ☐ 40 M		W: ☐ 8mm ☒ 10mm ☐ 12mm		
☒ 5 M ☐ 10 M ☐ 40 M		H:1.6mm		
		WATTAGE		
☒ IP44 ☒ IP65 ☒ IP68			BEAM ANGLE	
R:4.8W G:4.8W B:4.8W				
				LUMEN OUTPUT
NOTE: ☒ stands ☐ options				

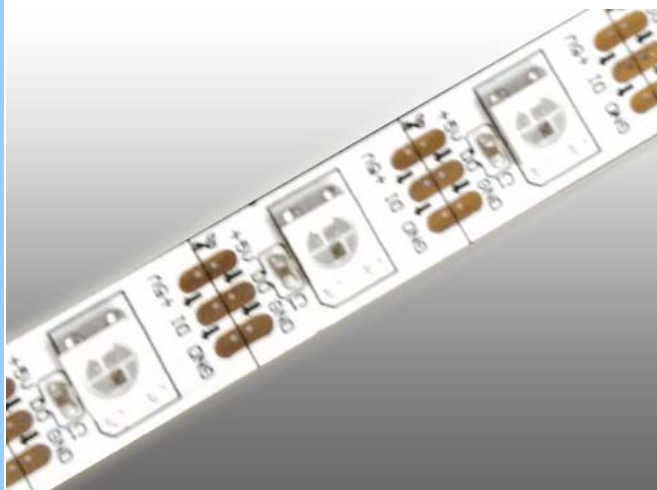

May.2014

Tel : +86- 755- 27649783

Fax : +86- 755- 27649624

mail: sales@willighting.com

Address: Building of Ming Jin Hai Industry Park, Zhoushi Road, Shiyuan Town, Shenzhen, Guangdong, China