



100W FLOOD LIGHT

Exploiter Series

Features

- ★ Special Design——Finned radiator, Small volume, light weight, low light decay.
- ★ High brightness——Adopting **BRIDGELUX/EPISTAR** chip, High brightness LEDs.
- ★ Energy Saving——Constant current driver, ultra-low consumption, high efficiency
- ★ Environment friendly——No UV and IR, No flicker. IP65 waterproof, outdoor in use.
- ★ Long Lifespan——Lifespan more than 35,000 hours.




BRIDGELUX

EPISTAR


AMW




Dimension

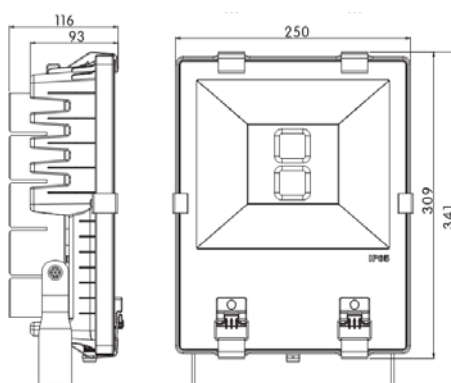

Intensity of illumination

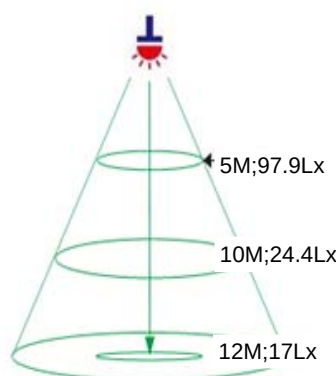

Distribution Chart

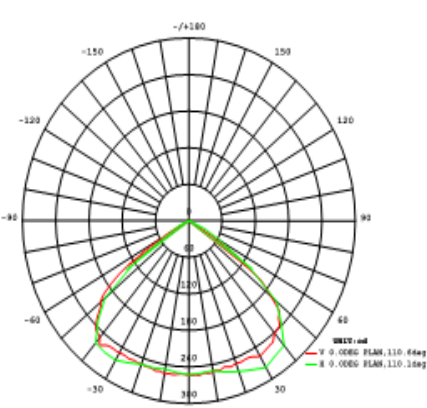

Technical Parameters

Item No.	WL-BR-FL-045
Input Voltage	AC85-265V 50-60Hz
Working Voltage	DC30-36V
Power Factor	> 0.9
LEDs	2*50W COB
Power Consumption	105W
Luminous Flux	> 8500 LM
Color Temperature	3000K/4500K/6000K
CRI	Ra > 70
Beam Angle	120°
Working Temperature	-25℃~55℃
Working Humidity	10%-90% RH
Keeping Temperature	-40℃~85℃
LED Life	≥35000H
Material	AL+Toughened glass
Product Size	341*250*116MM
Packing Size	395*345*250MM
Net Weight	5.4KG
IP Class	IP65

Application

★Billboard lighting, building exterior landscape lighting, high-pole lighting, road lighting, gardens lighting, etc.



Make comfortable
Make colorful

Willighting(ShenZhen) Co.,Ltd
Add: 6F E Building of Hong Rongfa Industry Area, No. 460 Xiang Shan Rd, Luotian Songgang,
Shenzhen, Guangdong, China
Tel: +86-755-27649783 sales@willighting.com www.willighting.com