


Features


- ★ Special Design—Finned radiator, Small volume, light weight, low light decay.
- ★ High brightness—Adopting **BRIDGELUX/EPISTAR** chip, High brightness LEDs.
- ★ Energy Saving—Constant current driver, ultra-low consumption, high efficiency
- ★ Environment friendly—No UV and IR, No flicker. IP65 waterproof, outdoor in use.
- ★ Long Lifespan—Lifespan more than 35,000 hours.




Dimension

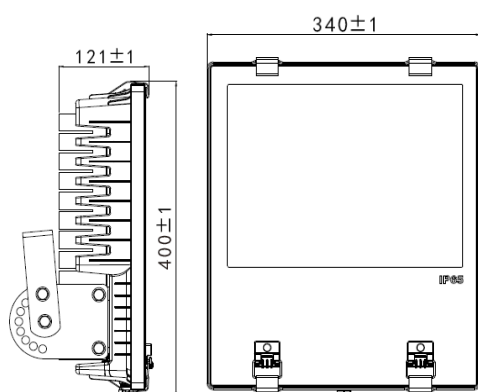

Intensity of illumination

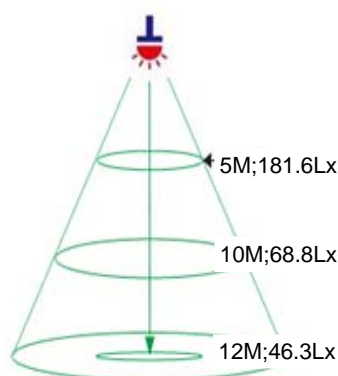

Distribution Chart

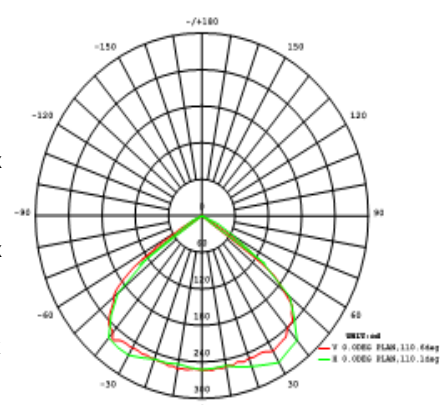

Technical Parameters

Item No.	WL-BR-FL-048
Input Voltage	AC85-265V 50-60Hz
Working Voltage	DC30-36V
Power Factor	>0.9
LEDs	4*50W COB
Power Consumption	210W
Luminous Flux	>15000 LM
Color Temperature	3000K/4500K/6000K
CRI	Ra>70
Beam Angle	120°
Working Temperature	-25°C~55°C
Working Humidity	10%-90% RH
Keeping Temperature	-40°C~85°C
LED Life	≥35000H
Material	AL+Toughened glass
Product Size	340*400*121MM
Packing Size	490*440*255MM
Net Weight	9.1KG
IP Class	IP65

Application

- ★ Billboard lighting, building exterior landscape lighting, high-pole lighting, road lighting, gardens lighting, etc.

