
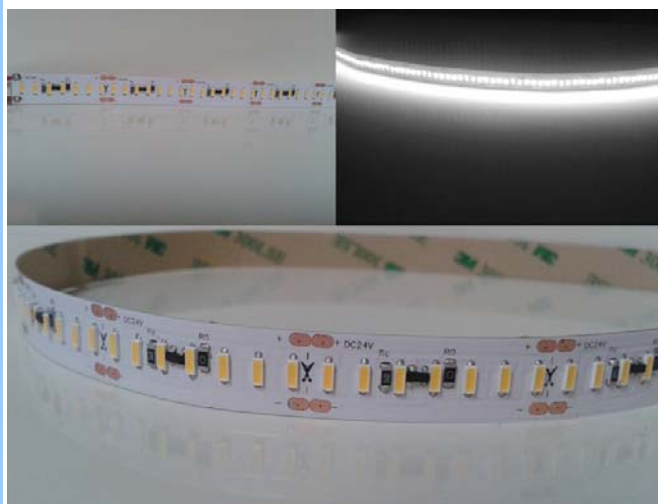


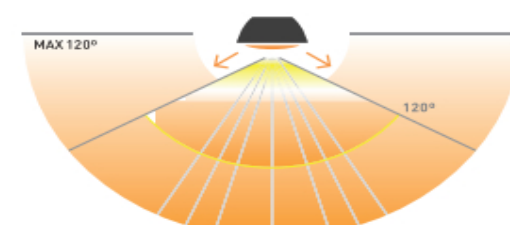

WL-F24V-210-W-4014

High CRI>80

High brightness and high CRI led strip (could be approve to CRI80). It could be over 3000lm per meter. It is with the Infineon IC which could protect the whole strips when the led strips are quite hot.

		 CUTTING INTERVALS
 VOLTAGE		can be cut into 33mm LENGTH
☐ 12V ☒ 24V		 PCB COLOUR
 PITCH		☒ White ☐ Black ☐ Gold layer
☐ 60 ☐ 90 ☐ 120 ☒ 210(leds/m)		 PROTECTION OPTIONS
 COLOUR OPTIONS		☐ IP44 ☐ IP65 ☐ IP68
6500K		 DIMENSIONS
 REEL LENGTH		W: ☐ 8mm ☐ 10mm ☒ 12mm
☒ 5 M ☐ 10 M ☐ 40 M		H:1.6mm
 WATTAGE		 BEAM ANGLE
☒ 26W ☐ Adjustable		
 LUMEN OUTPUT		
3300 lm		
NOTE: ☒ stands ☐ options		
		



May.2014

Tel : +86- 755- 27649783

Fax : +86- 755- 27649624

mail: sales@willighting.com

Address: Building of Ming Jin Hai Industry Park, Zhoushi Road, Shiyan Town, Shenzhen, Guangdong, China