


## Features


- ★ Good aluminum alloy heat sink with good quality heat dissipation, high strength.
- ★ High quality constant current driver-Mean Well, both to ensure the stability of the product, but also greatly reduce the power consumption.
- ★ Adopting Epistar or Birdgelux integrated chip, ant glare.
- ★ Constant voltage, constant current. Over voltage \ over power \ over current protection, lighting protection.
- ★ Start up within 1'3 seconds, no flicker, anti-jamming, no mercury, energy saving, environment friendly.




## Size

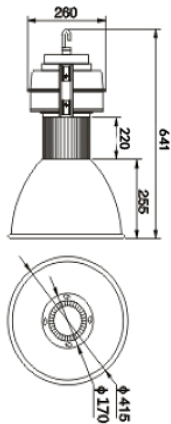

## Intensity of illumination

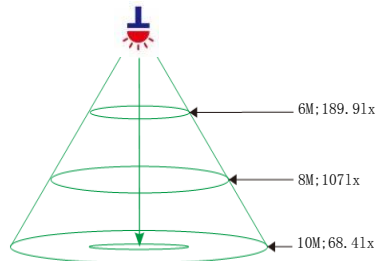

## Distribution Chart



## Technical Parameters


Item No.	WL-BR-HB-014
Input Voltage	AC 100-240V 50/60Hz
Working Voltage	DC 30-36V
Power Factor	>0.9
LEDs	1PCS
Power Consumption	125W
Luminous Flux	>10500lm
Color Temperature	3000K/4500K/6000K
CRI	Ra>70
Beam Angle	45°90°120°
Working Temperature	-25℃+45℃
Working Humidity	10%-90% RH
Keeping Temperature	-40℃+65℃
Lifespan	≥50000H
Material	6063AL+lens
Heatsink	D160*H220mm
Packing Size	250*250*385mm
Net Weight	8.38KG
IP class	IP65

## Application

★ Factories, workshops, warehouses, exhibition centers, shopping malls or supermarkets, stadiums, toll stations, etc.



## Angle Reflector

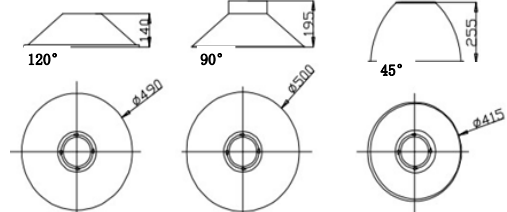

Make comfortable  
Make colorful

Willighting(ShenZhen) Co.,Ltd  
Add: 6F E Building of Hong Rongfa Industry Area, No. 460 Xiang Shan Rd, Luotian Songgang,  
Shenzhen, Guangdong, China  
Tel:+86-755-27649783 sales@willighting.com www.willighting.com