



500W FLOOD LIGHT


Exploiter Series

Features


- ★ Adopting Epistar/Bridgelux 10W integrated Chip as light source with high lighting efficiency. Luminous efficiency is up to 120lm/W
- ★ Taiwan Meanwell driver, constant voltage, constant current. Over voltage / over power / over current protection, lighting protection.
- ★ Premium Precise Optical Lens System, 2-10 times brighter than conventional light.
- ★ Anti-Glare System, suitable for any occasions.
- ★ Modular Design, Easier Maintenance.
- ★ IP66, underwater use support, 3 Years Warranty.




Dimension

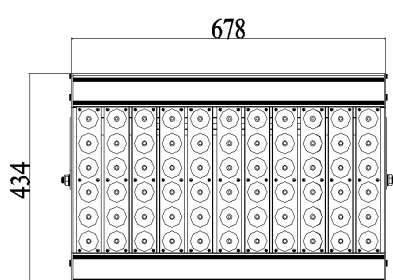

Intensity of illumination

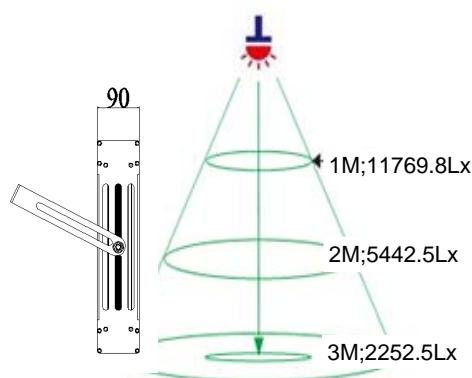

Distribution Chart

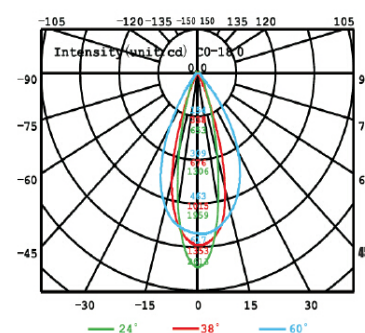


Technical Parameters

| Item No. | WL-BR-FL-055 |
|---------------------|---------------------|
| Input Voltage | AC 90-295V 50-60Hz |
| Working Voltage | DC 36V |
| Power Factor | >0.95 |
| LEDs | 66*10W |
| Power Consumption | 500W |
| Luminous Flux | >50000 LM |
| Color Temperature | 3000K/4500K/6000K |
| CRI | Ra>70 |
| Beam Angle | 10°/24°/38°/60°/90° |
| Working Temperature | -25℃~55℃ |
| Working Humidity | 10%-90% RH |
| Keeping Temperature | -40℃~65℃ |
| LED Life | ≥50000H |
| Material | 6063AL+lens |
| Product Size | 434X678X90mm |
| Packing Size | 525X765X175mm |
| Net Weight | 18KG |
| IP Class | IP66 |

Application

- ★ Airport, mine sites, roads, sports stadiums, replace the regular lighting sources, etc.

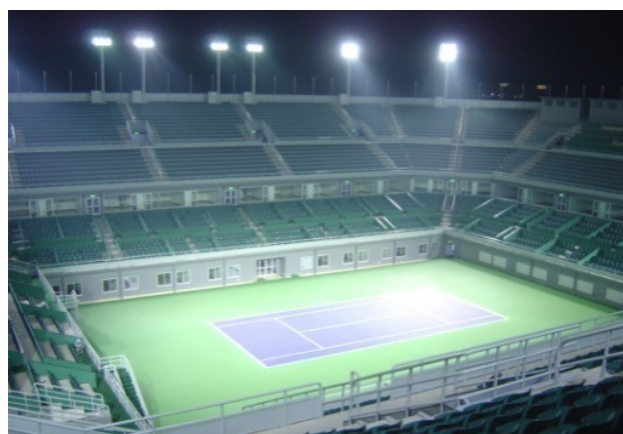

Make comfortable
Make colorful

BECKER Lighting Co., Ltd
Add: 3th floor, Num11, Dayang 2nd Road, Yulu, Gongming Town, Guangming New District, Shenzhen, China
Tel: +86-0755-29949630 sales@beckerled.com www.beckerled.com