




WL-F24V-96-W

High CRI>80
High brightness SMD3528 LED
and high quality. High intensity,
and stability.

		 CUTTING INTERVALS
 VOLTAGE	can be cut into 62mm LENGTH	
☒24V	 PCB COLOUR	
 PITCH	☒White ☐Black ☐Gold layer	
☐60 ☒96 ☐120 (leds/m)	 PROTECTION OPTIONS	
 COLOUR OPTIONS	☒IP44 ☒IP65 ☒IP68	
☒5500-6500K ☐7000k ☐9000k	 DIMENSIONS	
 REEL LENGTH	W: ☒ 8mm ☐ 10mm ☐ 12mm	
☒5 M ☐10 M ☐40 M	H:1.6mm	
 WATTAGE	 BEAM ANGLE	
☒10.8W ☐Adjustable		
 LUMEN OUTPUT		
560 lm		
NOTE: ☒ stands ☐ options		
      		

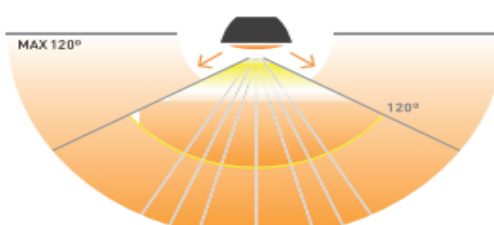

May.2014

Tel : +86- 755- 27649783

Fax : +86- 755- 27649624

mail: sales@willighting.com

Address: Building of Ming Jin Hai Industry Park, Zhoushi Road, Shiyan Town, Shenzhen, Guangdong, China