
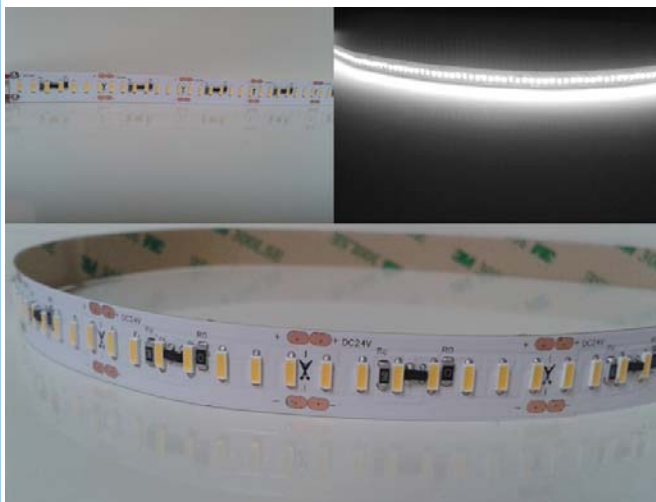


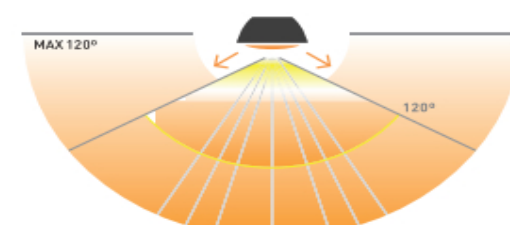

WL-F24V-180-W-4014

High CRI>80

High brightness and high CRI led strip (could be approve to CRI80). It could be over 3000lm per meter. It is with the Infineon IC which could protect the whole strips when the led strips are quite hot.

		 CUTTING INTERVALS
 VOLTAGE	can be cut into 33mm LENGTH	
☐12V ☒24V	 PCB COLOUR	
 PITCH	☒White ☐Black ☐Gold layer	
☐60 ☐90 ☐120 ☒180(leds/m)	 PROTECTION OPTIONS	
 COLOUR OPTIONS	☐IP44 ☐IP65 ☐IP68	
6500K	 DIMENSIONS	
 REEL LENGTH	W: ☐8mm ☐10mm ☒12mm	
☒5 M ☐10 M ☐40 M	H:1.6mm	
 WATTAGE	 BEAM ANGLE	
☒26W ☐Adjustable		
 LUMEN OUTPUT		
2800 lm		
NOTE:☒stands ☐options		
      		



May.2014

Tel : +86- 755- 27649783

Fax : +86- 755- 27649624

mail: sales@willighting.com

Address: Building of Ming Jin Hai Industry Park, Zhoushi Road, Shiyan Town, Shenzhen, Guangdong, China