



30W FLOOD LIGHT

Frosted Shell Series

Features

- ★ High brightness—Adopting **BRIDGELUX/EPISTAR** chip, High brightness LEDs.
- ★ Energy Saving—Constant current driver, ultra-low consumption, high efficiency
- ★ Environment friendly—No UV and IR, No flicker. IP65 waterproof, outdoor in use.
- ★ Long Lifespan—Lifespan more than 35,000 hours.




BRIDGELUX

EPISTAR


RoHS




Dimension

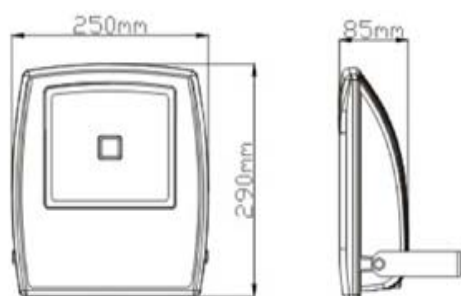

Intensity of illumination

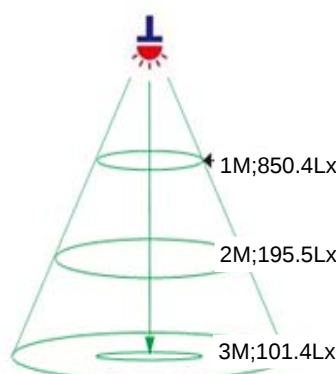

Distribution Chart

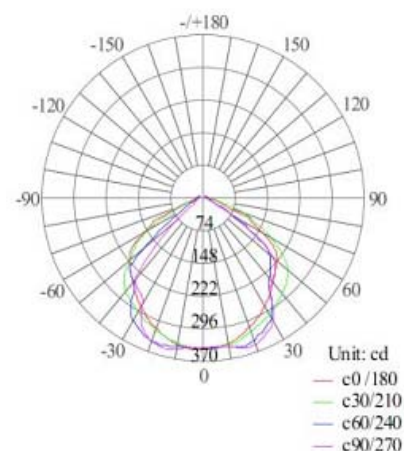

Technical Parameters

Item No.	WL-BR-FL-022
Input Voltage	AC85-265V 50-60Hz
Working Voltage	DC30-36V
Power Factor	>0.9
LEDs	30W COB
Power Consumption	32W
Luminous Flux	>2200 LM
Color Temperature	3000K/4500K/6000K
CRI	Ra>70
Beam Angle	120°
Working Temperature	-25℃~55℃
Working Humidity	10%-90% RH
Keeping Temperature	-40℃~85℃
LED Life	≥35000H
Material	AL+Toughened glass
Product Size	250*295*90MM
Packing Size	260*305*95MM
Net Weight	3.2KG
IP Class	IP65

Application

★Billboard lighting, building exterior landscape lighting, high-pole lighting, road lighting, gardens lighting, etc.



Make comfortable
Make colorful

Willighting(ShenZhen) Co.,Ltd
Add: 6F E Building of Hong Rongfa Industry Area, No. 460 Xiang Shan Rd, Luotian Songgang,
Shenzhen, Guangdong, China
Tel: +86-755-27649783 sales@willighting.com www.willighting.com