




WL-F24V-60-W

High CRI>80
High brightness SMD3528 LED
and high quality. High intensity,
and stability.

		 CUTTING INTERVALS
 VOLTAGE		can be cut into 99 mm LENGTH
■24V		 PCB COLOUR
 PITCH		■White □Black □Gold layer
■60 □90 □120 (leds/m)		 PROTECTION OPTIONS
 COLOUR OPTIONS		■IP44 ■IP65 ■IP68
■5500-6500K □7000k □9000k		 DIMENSIONS
 REEL LENGTH		W: ■8mm □10mm □12mm
■5 M □10 M □40 M		H:1.6mm
 WATTAGE		 BEAM ANGLE
■7.2W □Adjustable		
 LUMEN OUTPUT		
540 lm		
NOTE:■stands □options		
		

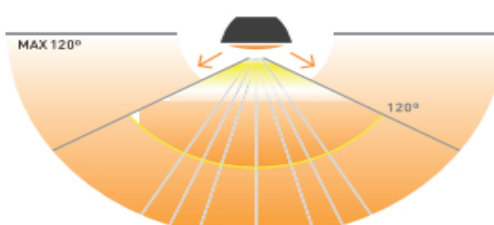

May.2014

Tel : +86- 755- 27649783

Fax : +86- 755- 27649624

mail: sales@willighting.com

Address: Building of Ming Jin Hai Industry Park, Zhoushi Road, Shiyan Town, Shenzhen, Guangdong, China