



30W RGB FLOOD LIGHT

RGB Series

Features


- ★ RGB Modules — More than 16777 thousand kinds of colors can be realized output.
- ★ Control type — Standard DMX512 interface or Remote or IR controller
- ★ Energy Saving — Constant current driver, ultra-low consumption, high efficiency
- ★ Environment friendly — No UV and IR, No flicker. IP65 waterproof, outdoor in use.
- ★ Long Lifespan — Lifespan more than 35,000 hours.




BRIDGELUX EPISTAR




Dimension

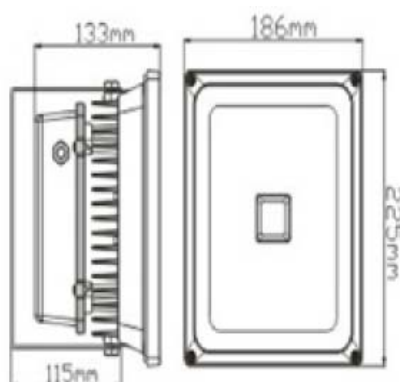

Intensity of illumination

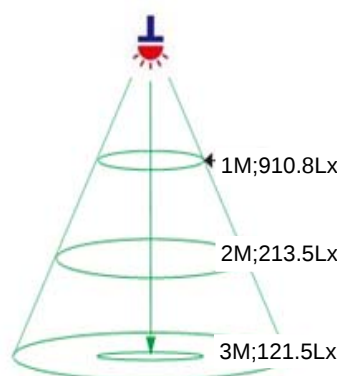

Distribution Chart

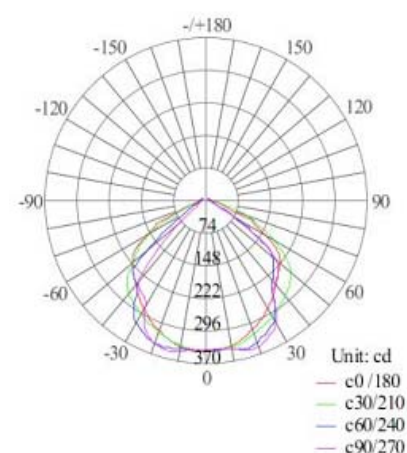


Technical Parameters

Item No.	WL-BR-FL-092
Input Voltage	AC 100-240V / DC 24V
Working Voltage	DC20-35V
Power Factor	>0.9
LEDs	10*RGB
Power Consumption	35W
Luminous Flux	R:420LM G:610LM B:230LM
Control type	DMX/IR/RF
RF frequency	315MHz
Beam Angle	120°
Working Temperature	-25°C~55°C
Working Humidity	10%-90% RH
Keeping Temperature	-40°C~85°C
LED Life	≥35000H
Material	AL+Toughened glass
Product Size	225*183*125MM
Packing Size	230*205*140MM
Net Weight	2.03KG
IP Class	IP65

Application

★ Billboard lighting, building exterior landscape lighting, high-pole lighting, road lighting, gardens lighting, etc.

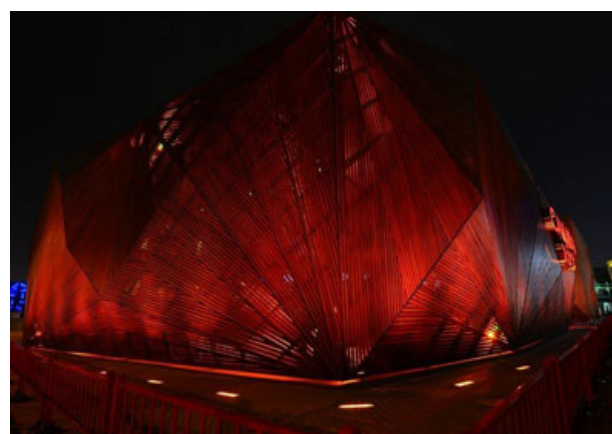

Make comfortable
Make colorful

Willighting(ShenZhen) Co.,Ltd
 Add: 6F E Building of Hong Rongfa Industry Area, No. 460 Xiang Shan Rd, Luotian Songgang,
 Shenzhen, Guangdong, China
 Tel: +86-755-27649783 sales@willighting.com www.willighting.com