


WL-F24V-240-W

High CRI>80
High brightness SMD3528 LED
and high quality. High intensity,
and stability.



		 CUTTING INTERVALS
 VOLTAGE	can be cut into 24.5mm LENGTH	
☒ 24V	 PCB COLOUR	
 PITCH	☒ White ☐ Black ☐ Gold layer	
☐ 60 ☐ 90 ☒ 240 (leds/m)	 PROTECTION OPTIONS	
 COLOUR OPTIONS	☒ IP44 ☒ IP65 ☒ IP68	
☒ 5500-6500K ☐ 7000k ☐ 9000k	 DIMENSIONS	
 REEL LENGTH	W: ☒ 8mm ☐ 10mm ☐ 12mm	
☒ 5 M ☐ 10 M ☐ 40 M	H:1.6mm	
 WATTAGE	 BEAM ANGLE	
☒ 19.2W ☐ Adjustable		
 LUMEN OUTPUT		
1400 lm		
NOTE:☒stands ☐options		
      		

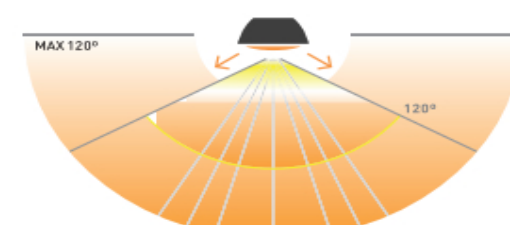

May.2014

Tel : +86- 755- 27649783

Fax : +86- 755- 27649624

mail: sales@willighting.com

Address: Building of Ming Jin Hai Industry Park, Zhoushi Road, Shiyan Town, Shenzhen, Guangdong, China