



# 100W FLOOD LIGHT


Exploiter Series

## Features


- ★ Adopting Epistar/Bridgelux 10W integrated Chip as light source with high lighting efficiency. Luminous efficiency is up to 120lm/W
- ★ Taiwan Meanwell driver, constant voltage, constant current. Over voltage / over power / over current protection, lighting protection.
- ★ Premium Precise Optical Lens System, 2-10 times brighter than conventional light.
- ★ Anti-Glare System, suitable for any occasions.
- ★ Modular Design, Easier Maintenance.
- ★ IP66, underwater use support, 3 Years Warranty.




## Dimension

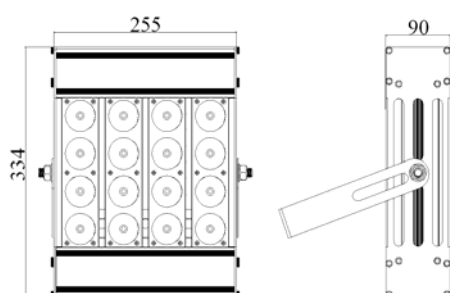

## Intensity of illumination

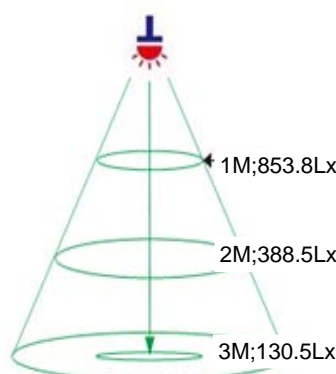

## Distribution Chart

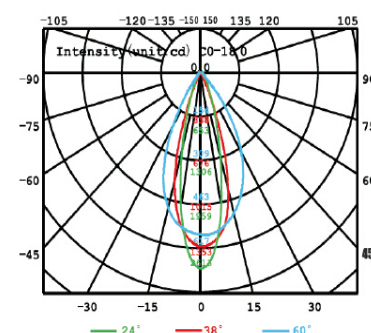


## Technical Parameters

Item No.	WL-BR-FL-050
Input Voltage	AC 90-295V 50-60Hz
Working Voltage	DC 36V
Power Factor	> 0.95
LEDs	16*10W
Power Consumption	100W
Luminous Flux	> 10000 LM
Color Temperature	3000K/4500K/6000K
CRI	Ra > 70
Beam Angle	10°/24°/38°/60°/90°
Working Temperature	-25℃~55℃
Working Humidity	10%-90% RH
Keeping Temperature	-40℃~65℃
LED Life	≥50000H
Material	6063AL+lens
Product Size	334X255X90mm
Packing Size	420X345X175mm
Net Weight	5.5KG
IP Class	IP66

## Application

★ Airport, mine sites, roads, sports stadiums, replace the regular lighting sources, etc.

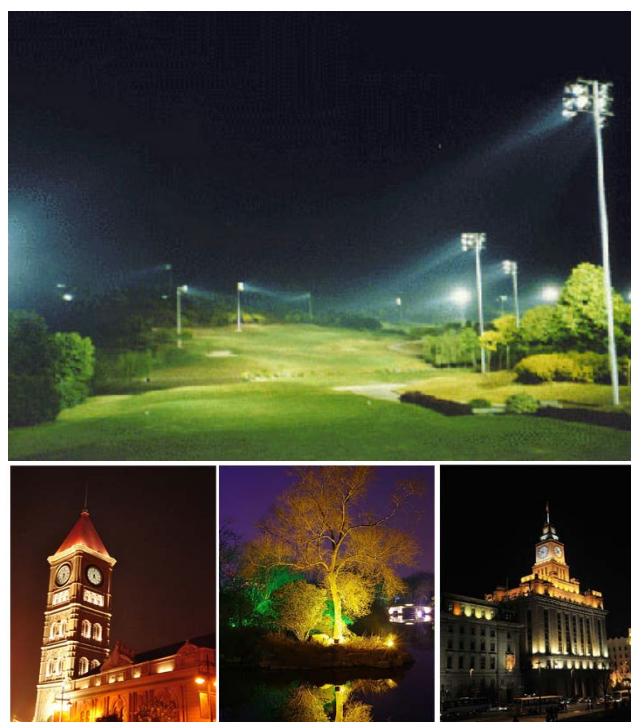

Make comfortable  
Make colorful

Willighting(ShenZhen) Co.,Ltd  
Add: 6F E Building of Hong Rongfa Industry Area, No. 460 Xiang Shan Rd, Luotian Songgang,  
Shenzhen, Guangdong, China  
Tel: +86-755-27649783 sales@willighting.com www.willighting.com