


Features


- ★ High brightness——Adopting **BRIDGELUX/EPISTAR** chip, High brightness LEDs.
- ★ Energy Saving——Constant current driver, ultra-low consumption, high efficiency
- ★ Environment friendly——No UV and IR, No flicker. IP65 waterproof, outdoor in use.
- ★ Long Lifespan——Lifespan more than 35,000 hours.
- ★ PIR Function——LED lamp turn on automatically when the body through the sensor area.




Dimension

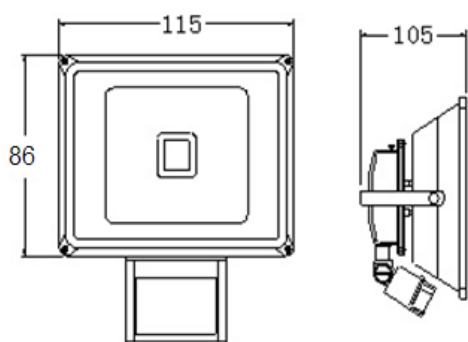

Intensity of illumination

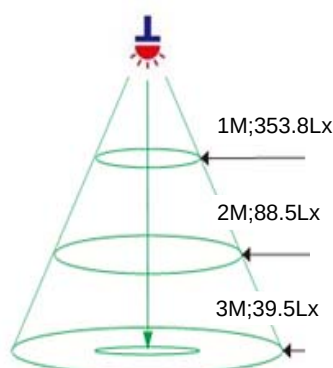

Distribution Chart

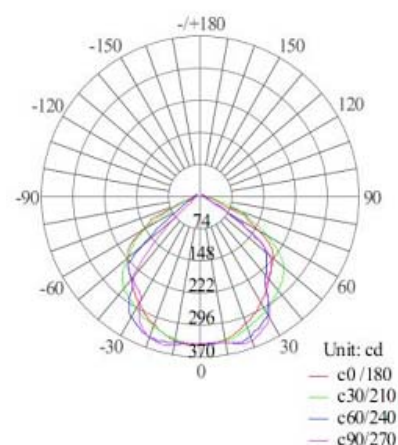

Technical Parameters

Item No.	WL-BR-FL-060
Input Voltage	AC100-240V 50-60Hz
Working Voltage	DC30-36V
Power Factor	>0.9
LEDs	10W COB
Power Consumption	12W
Luminous Flux	>850 LM
Color Temperature	3000K/4500K/6000K
CRI	Ra>70
Beam Angle	120°
Working Temperature	-25℃~55℃
Working Humidity	10%-90% RH
Keeping Temperature	-40℃~85℃
LED Life	≥35000H
Material	AL+Toughened glass
Detection range	120°
Detection distance	8-12m
Time-delay	Min:5sec,Max:15min
Ambient-light	<3-2000lux
Installation height	2-4.5m
Product Size	115*155*105MM
Packing Size	125*180*115MM
Net Weight	0.73KG
IP Class	IP65

Application

★Billboard lighting, building exterior landscape lighting, high-pole lighting, road lighting, gardens lighting, warehouse etc.

