



300W FLOOD LIGHT

Exploiter Series

Features

- ★ Adopting Epistar/Bridgelux 10W integrated Chip as light source with high lighting efficiency. Luminous efficiency is up to 120lm/W
- ★ Taiwan Meanwell driver, constant voltage, constant current. Over voltage / over power / over current protection, lighting protection.
- ★ Premium Precise Optical Lens System, 2-10 times brighter than conventional light.
- ★ Anti-Glare System, suitable for any occasions.
- ★ Modular Design, Easier Maintenance.
- ★ IP66, underwater use support, 3 Years Warranty.




BRIDGELUX


MEANWELL




Dimension

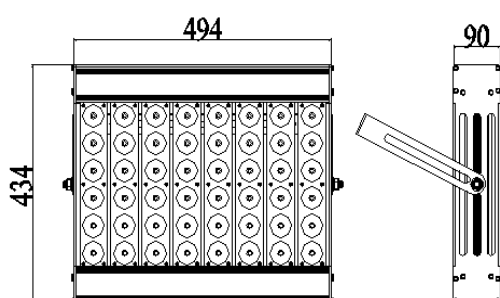

Intensity of illumination

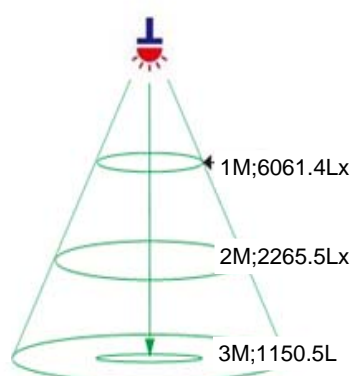

Distribution Chart


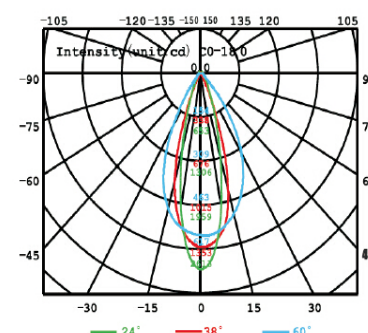


Technical Parameters

Item No.	WL-BR-FL-053
Input Voltage	AC 90-295V 50-60Hz
Working Voltage	DC 36V
Power Factor	> 0.95
LEDs	48*10W
Power Consumption	300W
Luminous Flux	> 30000 LM
Color Temperature	3000K/4500K/6000K
CRI	Ra > 70
Beam Angle	10°/24°/38°/60°/90°
Working Temperature	-25°C~55°C
Working Humidity	10%-90% RH
Keeping Temperature	-40°C~65°C
LED Life	≥ 50000H
Material	6063AL+lens
Product Size	434X494X90mm
Packing Size	525X585X175mm
Net Weight	14KG
IP Class	IP66

Application

★ Airport, mine sites, roads, sports stadiums, replace the regular lighting sources, etc.

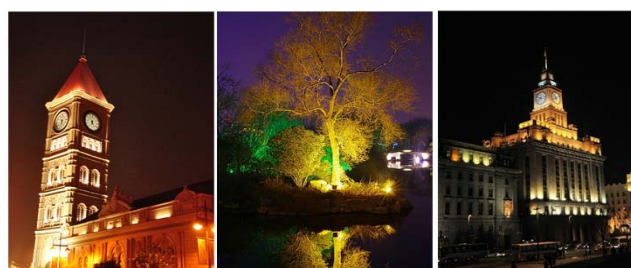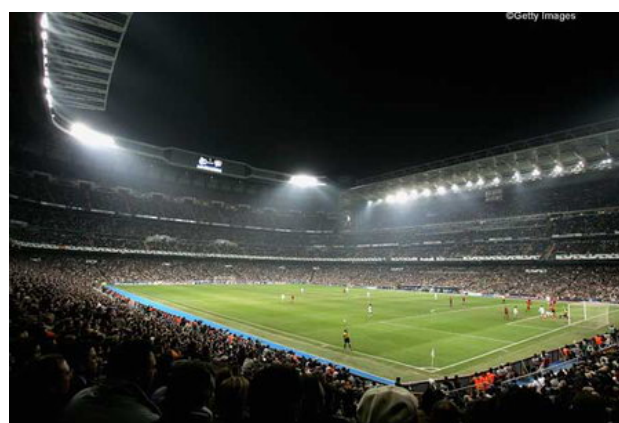

Make comfortable
Make colorful

Willighting(ShenZhen) Co.,Ltd
Add: 6F E Building of Hong Rongfa Industry Area, No. 460 Xiang Shan Rd, Luotian Songgang,
Shenzhen, Guangdong, China
Tel: +86-755-27649783 sales@willighting.com www.willighting.com